

PARTS & SERVICE NEWS

REF NO. AA00084

DATE June 20, 2000

(C)

Page 1 of 2

SUBJECT: RELEASE NEW MEANS OF MOUNTING ENGINE WIRING HARNESS

PURPOSE: Cost reduction and correction of drawing and BOM errors

APPLICATION: WA500-3LE Wheel Loader Serial Number A70001 through A70174

FAILURE CODE: D52081

DESCRIPTION:

Introduction:

The Parts Book for the WA500-3LE will be updated based on this PARTS AND SERVICE NEWS.


PARTS LIST

Item	Status	Part Number	Description	Qty
1	NEW	08034-20823	Dia 70 Band Tie	1
	OLD	-		-
2	NEW	25 520 R1	5-15" Nut	5
	OLD	120 375	1/4" Nut	5
3	NEW	01643-30827	Washer	10
	OLD	01643-30823	Washer	5
4	NEW	08036-01014	Clip	4
	OLD	08036-01014	Clip	6
5	NEW	09460-00000	Lock	2
	OLD	09460-00002	Lock	2

Instructions:

1. Band tie (Item 1) the harness to the aspirator tube.
2. Position of clippings (Item 4) changed to stud bolt location.
3. Change nut size from 1/4" to 5/16" (Item 2) and add 1 washer (Item 3) per location.

Engine Line Electrical System

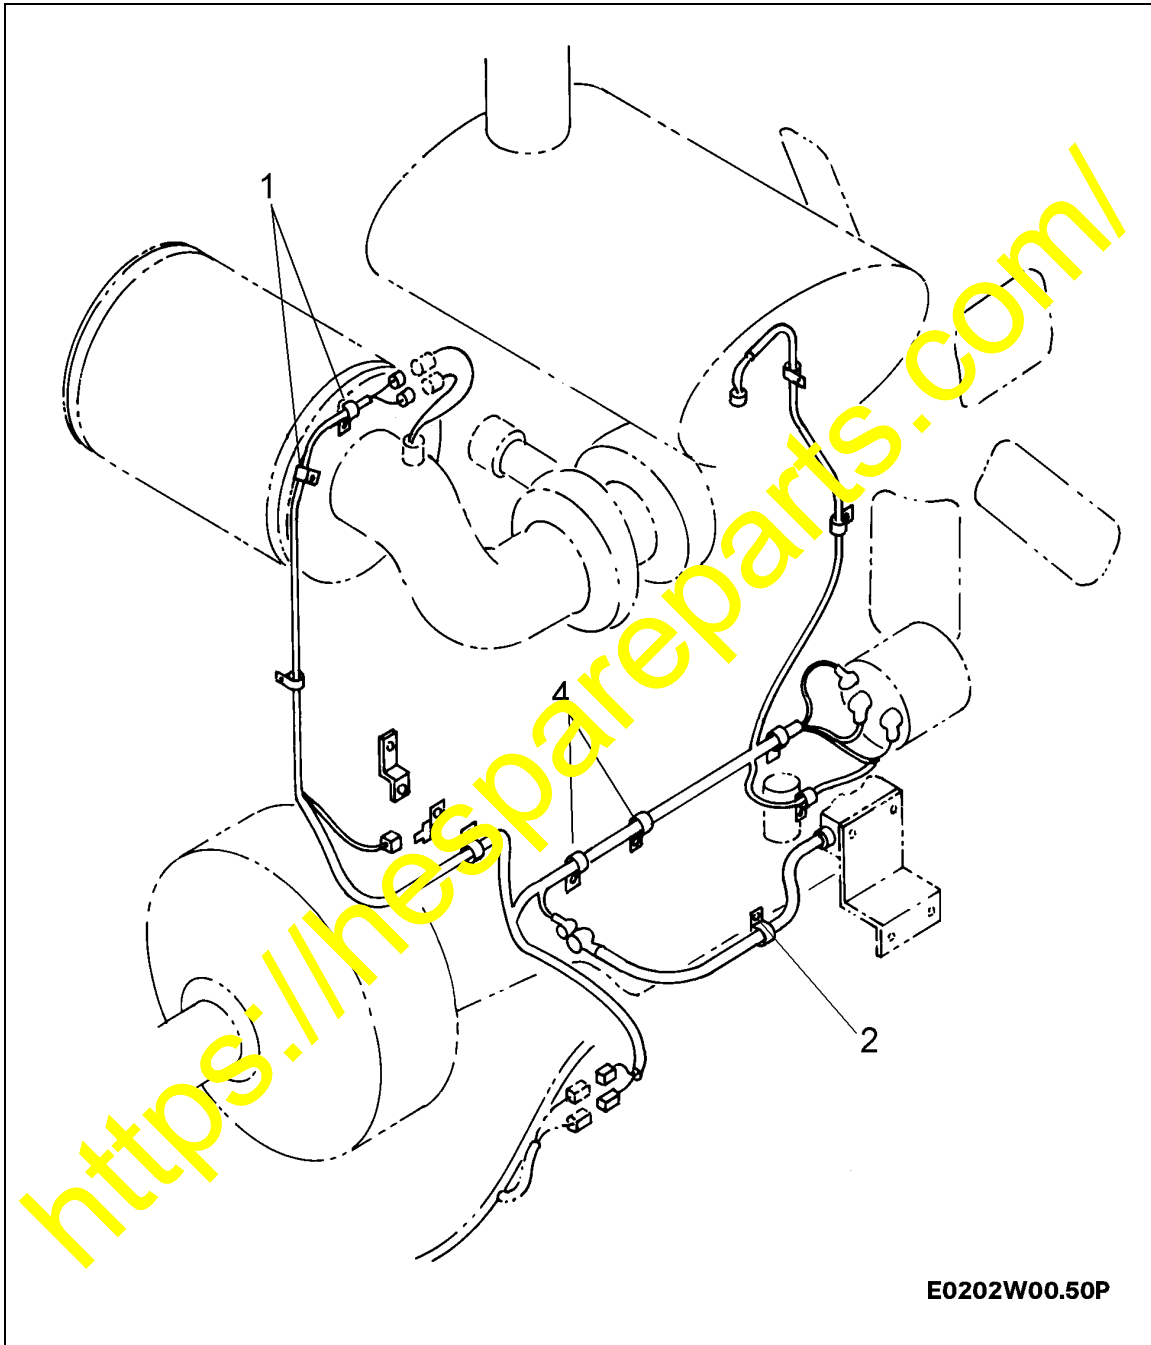

E0202W00.50P